

CITY OF WICKLIFFE, OHIO

CONCRETE/ASPHALT PERMIT APPLICATION

CONTRACTOR NAME: _____ Date: _____

Address: _____ Phone Number: _____

PROPERTY/JOB ADDRESS: _____

Owner's Name: _____

Please check each category below:

Commercial Permits: (see right of way if necessary)

PARKING LOTS/OTHER DRIVES, ETC. \$250.00 _____

RESIDENTIAL PERMITS:

Driveway _____ \$60.00 Garage Pad/Other _____ \$60.00

Private Walk _____ \$60.00 Patio Slab _____ \$60.00

RIGHT OF WAY PERMITS:

Sidewalks _____ \$40.00 Apron _____ \$40.00 Curb _____ \$40.00

Material Used: _____ EST. COST OF JOB: \$ _____

Acceptance of this permit herein applied for shall constitute an agreement on my part to abide by all conditions herein contained, and to comply with all City Ordinances and laws of the State of Ohio relating to work being done. Said agreement is a condition of this permit.

Final acceptance of this permit is contingent upon proper inspections, (Call 440 943-7115.)

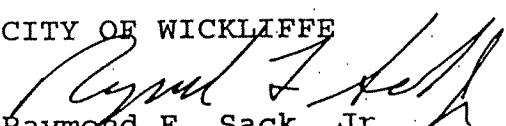
SIGNATURE: _____ City Official _____
(Approved by) _____

CITY OF WICKLIFFE, OHIO

REGULATIONS FOR RESIDENTIAL ASPHALT DRIVEWAYS

1. Work shall be performed by contractor registered, bonded and insured in City of Wickliffe.
2. Excavate 10" below finished grade for 6" of gravel, crushed stone or concrete compacted base course, upon which shall be placed 4" thick asphalt in 2 lifts consisting of 3" of 301 bituminous aggregate base and 1" of 404 asphalt concrete surface topping.
3. Any soft spots in bottom of excavation shall be removed.
4. Call 943-7115 or 7116 before 9:00 AM for inspection same day of 6" compacted base prior to, and allowing for, installation of 4" thick asphalt.
5. Finished driveway grade shall incorporate a swale with minimum low point of 3/4" in middle of driveway to avoid surface water from draining onto neighbor's property, and still maintain full 6" subbase and 4" asphalt throughout. Final inspection required showing swale. If no swale, installer shall remove and replace driveway with the swale.
6. A storm sewer connected to 12" catch basin (with trap and 18" sump) shall be located in front of garage or low point in driveway to intercept driveway drainage where necessary.
7. Asphalt street sidewalks are not permitted, nor is asphalt over existing concrete sidewalks allowed.
8. Tar and chip streets without street sidewalks shall have 6" thick asphalt for driveway street apron over 3" granulated gravel or stone base. Call 943-7125 (Service Dept.) for inspection of 3" base 24 hours prior to placing 6" thick asphalt apron in street right-of-way.

CITY OF WICKLIFFE


Raymond F. Sack, Jr.
Building Commissioner